

SAFETY RULES



Do not connect the device to loads exceeding the permitted values.



Connect only in accordance with the diagram presented in the manual. Improper connections may be dangerous, it can damage the controller, and loss of the warranty.




DANGER! Risk of electric shock! Even with the device turned off, the outputs may be live. All assembly work should be ALWAYS performed with the disconnected power circuit.



The installation of the device to a power mains that does not meet the quality requirements defined by EN 50081-1, EN 50082-1, UL508, EN 60950, will result in the loss of the warranty.

CONNECTION DIAGRAM

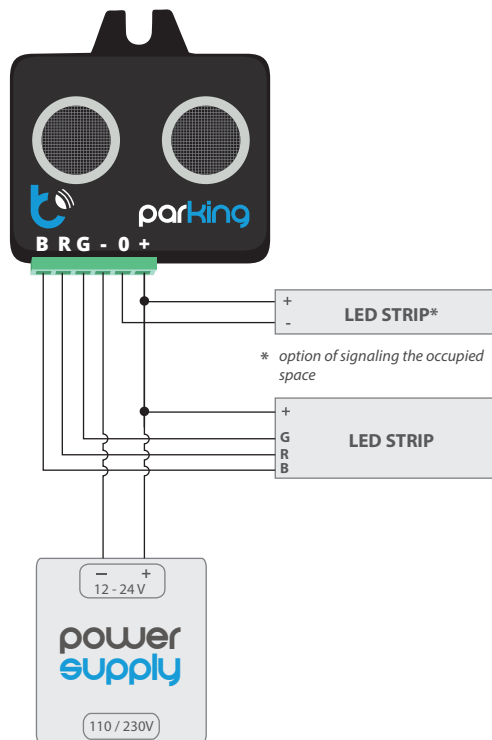


1

INSTALLATION

- Before installing the sensor, disconnect the voltage in the supplied circuit. Remember that all assembly work should be carried out with the power supply disconnected.
- The sensor should be mounted in a place protected from adverse environmental conditions. It is advisable that the device is mounted in a stable and stationary position.

- Mount the device vertically at the height of the farthest part of the car (usually a bumper or license plate) as in the drawing below, so that the connector is at the bottom.

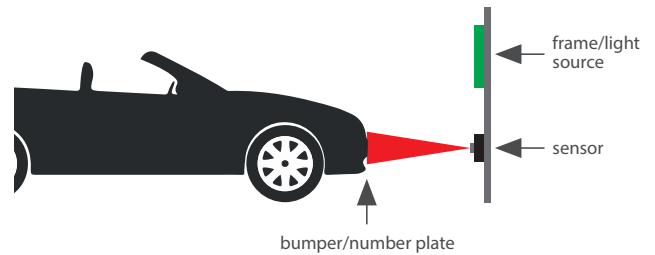

- Connect the LED strips and power supply to the device according to the diagram.
- Optionally, connect the LED lamp indicating the occupancy of the parking space. When the vehicle is within range of the sensor, the lamp will remain on continuously.

2

FIRST START-UP

- Connect the power supply. Bring your hand or paper closer to the ParkingSensor sensor, the color of the light should change with the detector:

green color

you can move forward safely

blue color

you are close to the obstacle

red colour

stop the vehicle

pulsing red color

stop the vehicle immediately!

- the time of the color illumination (red / blue / green) is 10 seconds, while the optional LED lighting shines during the entire period of occupancy of the parking space.


3

MOVEMENT OF THE VIRTUAL WALL

- the range of the color changes are established in relation to the virtual wall. By default, the virtual wall is at a physical distance of 2 cm from the sensor. It can be adjusted in the physical range 2 cm..250 cm of the sensor by performing the following steps:
 1. place a flat object (for example, a piece of cardboard) in front of the sensor at the desired distance, such as a virtual wall;
 2. connect the power supply; wait 5 seconds; disconnect the power supply;
 3. connect the power supply; wait 10 seconds; disconnect the power supply;
 4. connect the power supply; wait 15 seconds; disconnect the power supply;
 5. connect the power supply; wait until the LED strip turn on white and then turn off, which means that the configuration has been saved; check if the virtual wall works as expected.



MOVEMENT OF THE VIRTUAL WALL

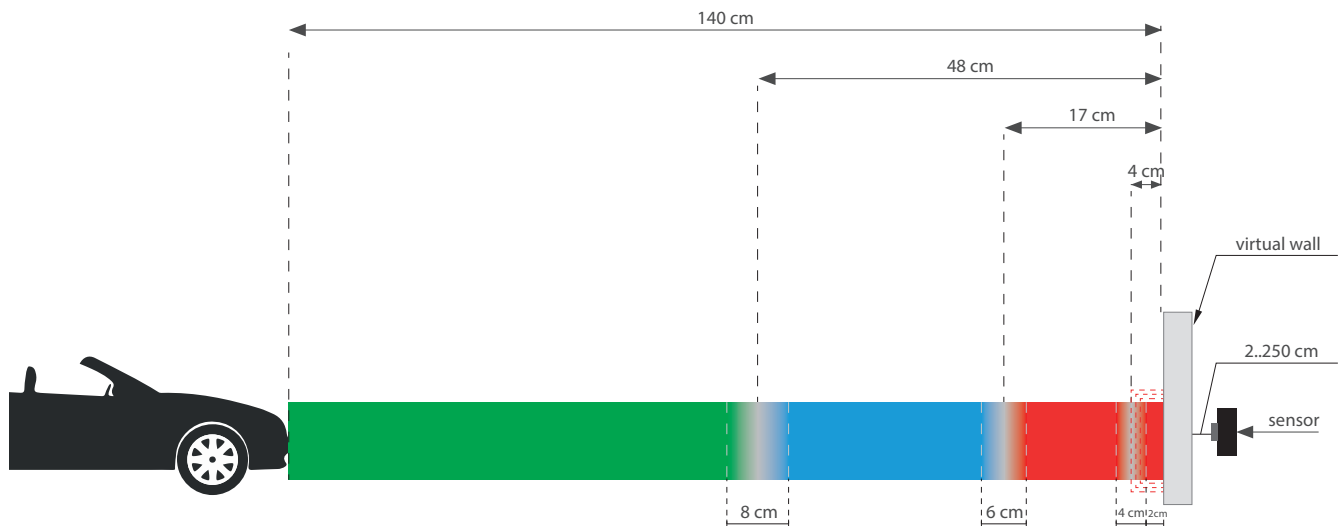

TECHNICAL SPECIFICATIONS

supply voltage	7 – 24V DC
maximum current	8 A
energy consumption	< 1 W
dimensions	50 x 40 x 25 mm with connector: 50 x 50 x 25 mm
number of PWM channels	3 (RGB)
type of output	open collector, 250mA
sensor	ultrasonic, distance sensor
protection level	IP20
operating temperature range	from -10 to + 40°C
calibration of notified distance	yes
housing	made of polyurethane composition not containing halogens, self-extinguishing for thermal class B (130 °C)

for more information
visit our website

www.blebox.eu

or send us an email to:
info@blebox.eu

support is available at
support@blebox.eu

made in europe



proudly made by
blebox