



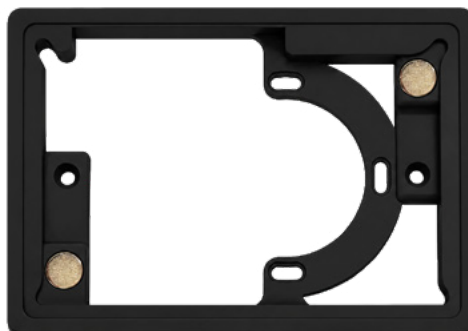

TECHNICAL SPECIFICATIONS

material	high-quality photopolymer material, coated with a decorative protective matte paint finish
available colors	black, white
dimensions	144 x 101 x 13 mm
screen attachment method	magnetic, toolless mounting system – two strong neodymium magnets (Ø 12 mm) factory-bonded in diagonally opposite corners of the frame
mounting method	On an electrical box: via 3 through-holes Ø 4 mm, arranged on a circle in accordance with the standard Ø 60 mm flush-mounted box (60 mm screw spacing) Directly on the wall: via 2 through-holes Ø 4 mm, located on the inner side of the shorter edges of the frame (hole spacing 109.50 mm)
additional content	suction cup for easier screen removal
protection level	IP20
operating temperature	from 0°C to +40°C

Available colours

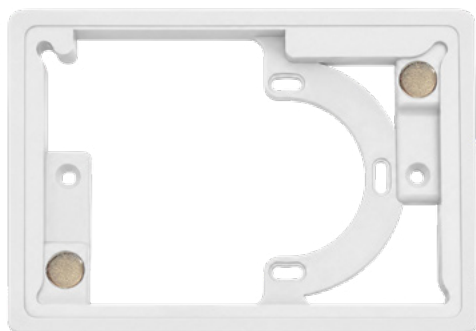


Surface-mounting diagram




NOTE! The frame should be mounted only using a screwdriver. Using a screwdriver may cause damage to the product, for which the manufacturer is not responsible. The above recommendation applies to all mounting holes.


1. Dimensions and description of the framePanelM accessory

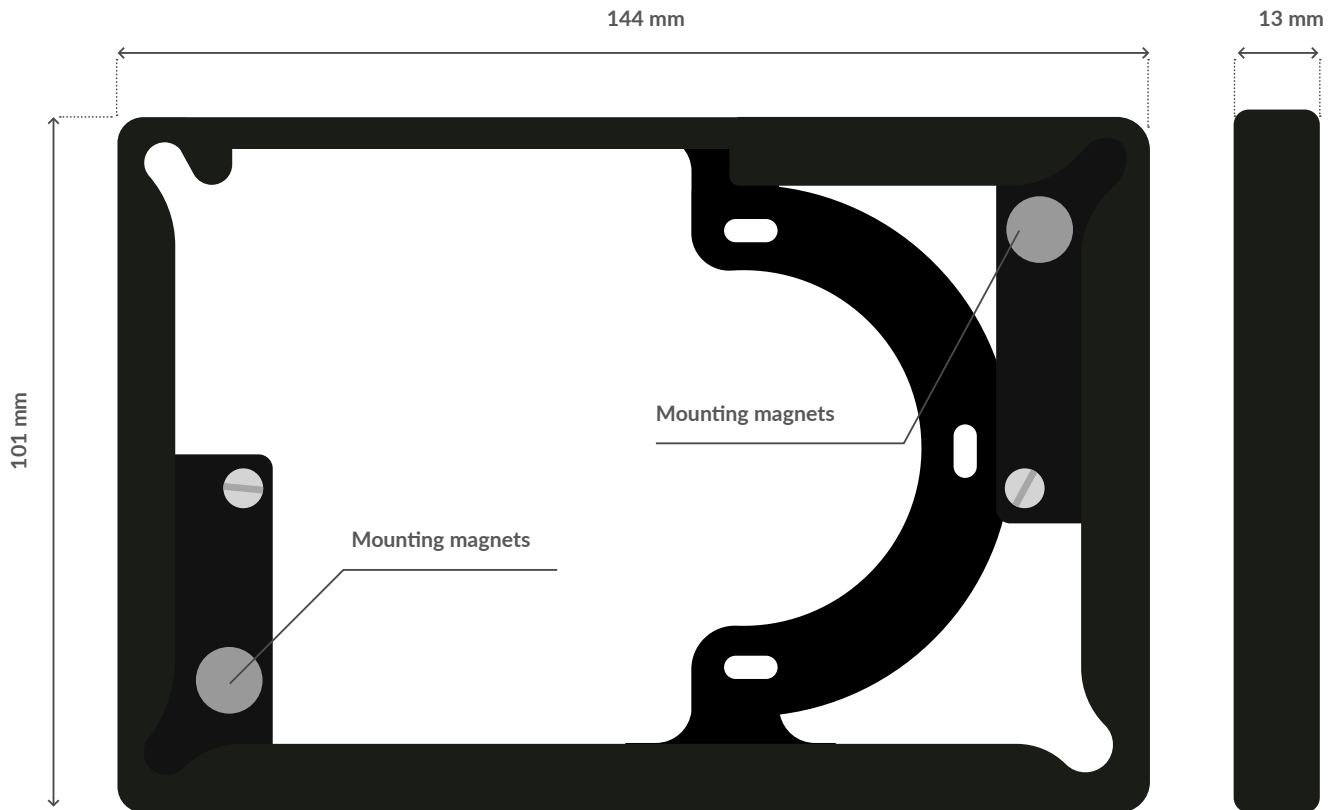

2. Mounting the framePanelM to a Ø 60mm electrical box

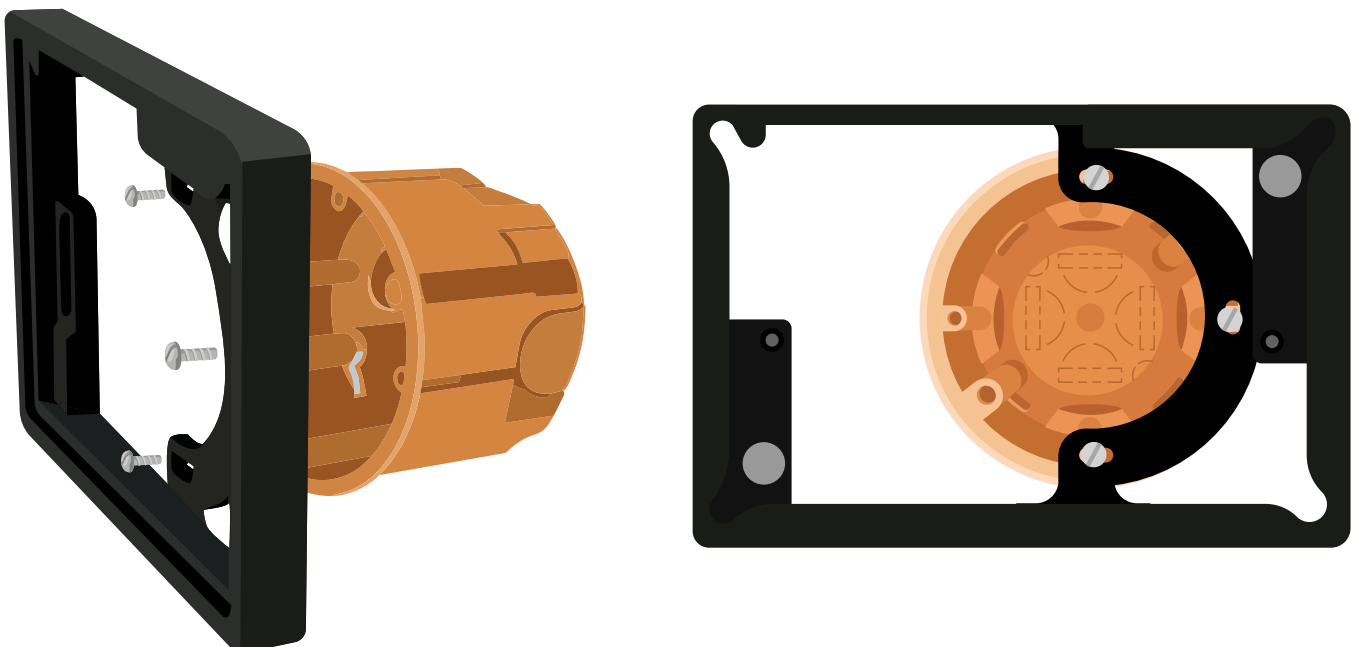

3. Mounting the framePanelM to the wall using expansion bolts

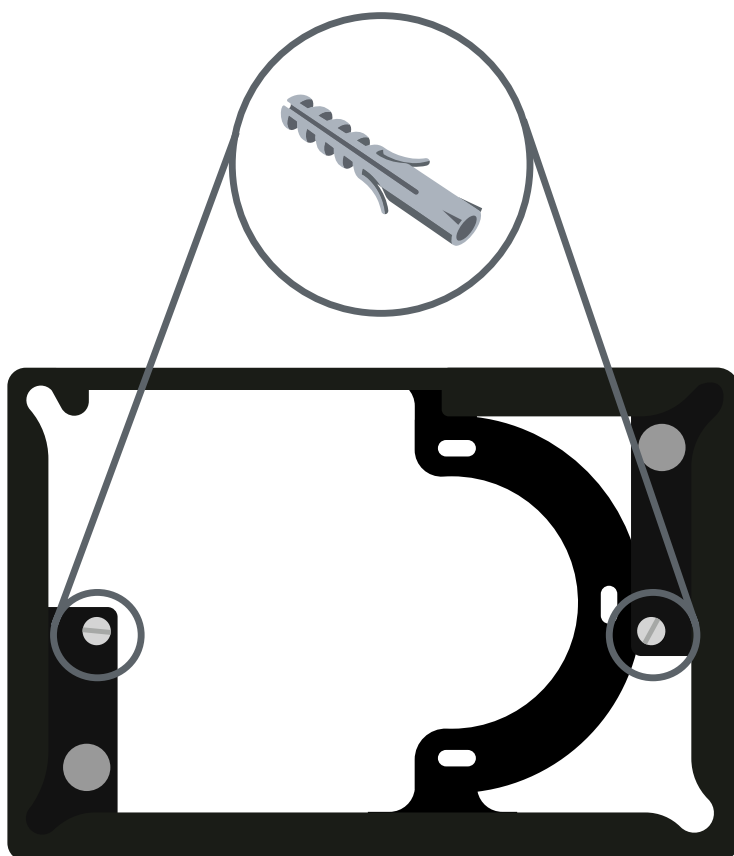

4. Mounting the controlPanelM to the framePanelM frame

